

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

⑫ **EUROPEAN PATENT APPLICATION**

⑲ Application number: 90305218.1

⑤① Int. Cl.5: G06F 15/40, G06F 1/00

⑳ Date of filing: 15.05.90

③① Priority: 15.05.89 US 352081

④③ Date of publication of application:
22.11.90 Bulletin 90/47

⑧④ Designated Contracting States:
DE FR GB

⑦① Applicant: International Business Machines
Corporation
Old Orchard Road
Armonk, N.Y. 10504(US)

⑦② Inventor: Fabbio, Robert Anthony
8406 Saber Creek Trail
Austin, TX 78759(US)

⑦④ Representative: Harris, Ian Richard
IBM United Kingdom Limited Intellectual
Property Department Hursley Park
Winchester, Hants. SO21 2JN(GB)

⑤④ System for controlling access privileges.

⑤⑦ The system and method of this invention provides an access control list which spans across object boundaries in an object oriented database. In addition to providing read and write access permissions, the access control list provides execute semantics which apply to the execution of methods in an object oriented database. Within the entries of the access control lists, each of the permissions for read, write, and execute can be assigned separately to each of a number of ids representing user ids or group ids. Upon request for access to the data by the user, the user id of the user and the group ids for which the user is a member are searched for within the entries to determine whether the user has the privileges to perform the operation requested against the objects. In addition, the access control policies are inherited from an object's superobject; resulting in a least privilege for the object.

EP 0 398 645 A2

SYSTEM FOR CONTROLLING ACCESS PRIVILEGES

This invention relates to a system for controlling access privileges to data within a data processing system.

In a relational database, data is viewed as rows and columns, where a row represents a record, in tables. In order to retrieve records that represent the spanning of multiple tables, relational operators, such as a join operation, are utilised. Although relational operators are used within applications or by users through a query language, these relational operations are not incorporated within the data such that the relational database manager can automatically intuit such relationships. In order to retrieve a record from the database, the user must have read permission for that record. In order to change the data in the record, the user must retrieve (select and fetch) the data into memory, update the record in memory, and then write the updated record to the database. The user must have permission to write the record before the database manager allows the previous data to be overwritten in the database. Moreover, in order to update the record in memory, the user must be cognizant of the column's attributes, such as whether that column contains integers, characters, strings etc.

In an object oriented database, the navigation through the data is similar to that of the network model where an object oriented database manager traverses the relationships defined amongst the objects and subobjects. In contrast to the relational database model, relationships between objects and subobjects are defined through the data, and not through explicit operations. Moreover, in complex application environments, objects and their relationships usually show very complex internal structures and comprise larger numbers of properties; such properties include methods. In addition, the object oriented database model parallels the object oriented programming model in that one may inherit attributes and methods from predecessor objects. However, the object oriented programming model generally deals with objects that are temporal in nature, i.e., memory resident. The object oriented database model extends the programming model by allowing one to deal with objects that persist, i.e., are disk resident. One of the features of object oriented databases (analogous to the programming model) is to provide the ability to define generic operations, i.e. methods, which apply to the objects, for the purposes of manipulating and retrieving them. In the relational database model, all operations to retrieve and manipulate records are performed by using the database manager's application programming interface or query language. The

object oriented methodology insulates the users of the database from the data representation and/or data structures that comprise objects. All retrieval and update operations may be performed through the use of these methods.

In the relational database model, access privileges may be set on the records such that grant and revoke authorisation privileges can be determined per user of the database. The records are tagged with either read or write privileges for specific users. For example, the first record could be read by users A, B, and C, and only written by user C. Likewise, the second record could be tagged such that only user A has the permission to read, and only user A has the permission to write.

For example, if a database contained payroll information, members of the payroll department may be able to read all of the payroll information for all departments except the payroll record for their payroll department. Only the manager of the payroll department would have the permission to read the record containing the payroll department data. If a user attempted to retrieve the records which did not define read privilege for the user, that user would not be granted the ability to see that record of data.

One shortcoming of relational databases is that access permission control is on a record basis.

Therefore in accordance with the present invention there is provided a system for controlling access privileges to data, the system comprising: means for assigning at least one access control policy across a plurality of objects in an object oriented database; and means for controlling a plurality of operations to at least one of the plurality of objects based on the assignment and at least one credential of a user requesting access to the data represented by at least one of the plurality of objects.

The definition of an access control list thereby applies to objects in an object oriented database.

According to preferred features of the invention ones of the plurality of operations may be a read operation, a write operation or an execute operation.

If one of the plurality of operations is an execute operation it is a further preferred feature of the invention that the execute operation applies to the execution of at least one method associated with the object.

The invention thereby applies an access control list to authorise the invocation of an operation on an object for changing the state of the object in addition to the permissions of read and write access.

According to a further preferred feature of the invention the system further comprises means for inheriting the assigned at least one access control policy of the at least one object. The system may further comprise means for inheriting the assigned at least one access control policy by a second object descending from the at least one object.

The definition of an access control list thereby spans the objects and subobjects in an object oriented database.

According to a further preferred feature of the invention the means for inheriting comprises means for determining the least amount of privilege associated with at least one composite object accessed by the user. The at least one composite object may comprise one of the plurality of the objects and at least one subobject.

In this way there can be provided a mechanism whereby access control policies on objects may be inherited from their superclass objects; resulting in the least privilege.

According to another preferred feature of the invention the at least one access control policy is associated with a plurality of users and a plurality of groups.

According to another aspect of the invention there is provided a procedure for controlling access privileges to data, the method comprising: assigning at least one access control policy across a plurality of objects in an object oriented database; and controlling a plurality of operations to at least one of the plurality of objects based on the assignment and at least one credential of a user requesting access to the data represented by at least one of the plurality of objects.

Each entry in the access control lists can contain access control information for either users or groups of users specified by the corresponding user ids or group ids. The access control list has the information necessary to determine the privileges of read, write, or execute for a set of users or groups. Furthermore, upon receiving a list of user ids and group ids, the access control check routines perform a logical AND operation across the set of credentials represented by the different ids and returns the least amount of privilege.

An embodiment of the invention will be described in the ensuing description with reference to the following figures, wherein

Fig. 1 is a block diagram of the system of this embodiment having an object data manager for controlling the access to objects in an object database according to an access control policy associated with the objects and the user's credentials.

Fig. 2A is a hierarchy of objects in an object database showing superobjects, objects, and subobjects.

Fig. 2b is an illustration of an access control list for each object in an object database.

Fig. 2C is a hierarchy of interface menu objects in and object database showing superobjects, objects, and subobjects.

Fig. 3A is a flow diagram of the object data manager utilising the access control facilities to determine whether a particular operation against a set of object classes and objects are permitted.

Fig. 3B is a flow diagram of the methodology for granting or revoking the operations based on the access control policies.

Fig. 3C is a continuation of the flow diagram of Fig. 3A.

Fig. 4 illustrates the structure of the access control list.

Fig. 5A shows the access control policy of this embodiment used in conjunction with a system management interface tool for controlling the administrative views of menu objects.

Fig. 5B shows a hierarchy of system management interface menu option objects.

The data processing system 1 has an operating system running in memory 3 which has tables 30 which contains the credentials 31 for each active user 32. The credentials identity 31 contains the user id 33, and the group ids 34 for which the user belongs and other security information 35. In user memory 4, the object data manager 40 accesses the objects found in the file system. The file system 20 resides on disk 2 which has object classes 50, as shown in Fig. 2A and Fig. 2C.

Referring to figure 2A, object class 54 is a super class of objects 55 and objects 56, and objects 55 is a superclass of objects 57. An example is described in copending European application number (IBM internal docket No AT9-89-031), inventors RA Fabbio et al for "An Open System Management Architecture for a Data Processing System". Likewise, objects 55 are a subclass of object class 54, and object classes 57 are subobjects of object class 55. The object class of the system management interface tool comprises interface menu option objects, as shown in Fig. 2C. An example of such an interface tool is described in copending European application number (IBM internal docket No AT9-89-039), inventors RA Fabbio et al for "User interface tool".

Referring back to Fig. 1, the object data manager 40 is cognizant of absolute access control policy assignment and authorisation per object. The authorisation process reviews the user's credentials 31 described to the object data manager 40 and uses this information to determine the operations which are permissible on each object.

When the object data manager is requested to perform operations on specific objects, i.e. retrieve or modify, the object data manager first determines

the current credential attributes 31 for the user 32 requesting the operation by interfacing with the kernel 3. The object data manager then performs the operation which may require inheritance or subclass traversal through the objects. As the object data manager performs such an operation, the access control policies lists are checked for each object satisfying the criteria of the operation. Access control policies are treated like other attributes within an object class in that they may be inherited from other superclasses, thus altering the access control policies as traversal of the objects is performed.

Fig. 2B represents a user defined view of the devices object class 54 and one of its subclasses, customised devices 55. Devices object class 50 contains attributes 71, methods 72 and triggers 73. For example, for an object class of customised devices 55, the attributes 71 would represent the definition of the object such as device name 74 character string, device id 75 integer number, and device type 76 character string, etc. The methods 72 are the operations that apply to the object. For example, a method of configuring the device 77, the method of defining the device 78, the method of unconfiguring 79, and the method of undefining 80 the object, etc. Triggers 73 represent the events that are automatically invoked when the objects are manipulated.

In addition to the user defined attributes 71, the object data manager transparently maintains a separate access control list 100 as part of each object within each object class. The access control list is further shown in Fig. 4. The access control list 100 maintains the owning user id 101 and the owning group id 102 for each object. This owning information 101, 102 dictates the access control policy for maintenance to the access control list itself. Only those owning users and owning groups can alter the access control list in an object. Before any access control entry is altered for any object, the object data manager first verifies that the user can be identified through its credentials in either the owning user id 101 or the owning group id 102.

The access control attributes on each object consists of eight 32 bit entries 111-118, of which seven of these entries 111-117 represent the user or group ids making up the access control list 100. The eighth entry 118 is divided into eight 4-bit slots 121-128, where the first seven slots 121-127 represent the privileges associated with the corresponding access control entry 111-117. The eighth 4-bit slot 128 is used to keep the count of the number of entries used. In the first seven 4-bit slots 121-127, the first three bits represent read, write, and execute privileges while the last bit of the 4-bit slot indicates whether the corresponding access control entry applies to a user or a group id.

Fig. 3A illustrates the high level flow of the object data manager utilising the access control facilities to determine whether a particular operation against a set of object classes and objects are permitted. The object data manager opens the appropriate object classes, step 301, and determines if the open succeeded, step 302. The object data manager then iterates for each object class that was opened, step 303. When the list of object classes opened are processed, the results are accumulated and returned to the user, step 304. If there are object classes to process, the object data manager acquires the user's credentials from the operating system (resultant is the least privilege associated for that user based on the set's credentials), step 305. The object data manager then performs the retrieval of the selected objects, step 306, and checks to see if the object is available for further processing, step 310, specifically whether the access privileges for the user do not conflict with the access controls assigned to the object being accessed. Specifically, the object data manager checks in the operating system for the credentials for the user, and checks these credentials with the list of access control privileges defined by the objects retrieved. If the access privileges are denied, the object data manager then checks to see if there are more objects that meet that selection criteria, step 315. If so, the object data manager returns to step 305. If not, the object data manager returns to step 303. Given that the object holds the appropriate access controls for further processing, step 320, the object data manager performs the specific operations generally defined by the methods. The object data manager accumulates the new set of access control information for the user based on the bitwise ANDing of the object's access controls, step 325 and returns to step 315 to determine whether there are more objects to retrieve. In step 325, the object data manager uses this technique to inherit the least access privilege that spans the objects of interest.

Fig. 3B describes in more detail step 310 from Fig. 3A which describes the methodology for granting or revoking the operations based on the access control policies. The access control facility first determines whether the requested mode supplied to it are valid, step 328. Given that the modes are valid, the object data manager defines a bit mask which is representative of the requested modes, step 331. In addition, the object data manager accesses the in memory version of the access control list assigned to a particular object, step 335. Once the access control list has been acquired, the object data manager determines the number of entries utilised within the list, step 337. If the count is not greater than zero, step 331, the object data manager grants access to the object by the user,

step 341. If the count is greater than zero, the object data manager compares the user's credentials to the access control entry representing either a user or a group, step 344. If there is a match, the object data manager saves the index of the matching access control entry, step 346. It then checks to see if there are additional access control entries, step 352, and if so, returns to step 344. If additional entries do not exist, the object data manager determines if there were any matches between the user's credentials and the object's access control entry, step 355. If there are none, the access is denied to the object for that user, step 357. If a match exists, the object data manager acquires the privilege bit mask defined for that user on that object, step 359, Fig. 3C. The object data manager then checks to see if the requested bit mask is greater than the user's bit mask defined by the access control entry within that object, step 361. If the requested bit mask is greater, then access is granted to the object for that user, step 363. If the requested bits are less than or equal to, then a bitwise AND operation is performed between the requested bit mask and the bit mask found in the object's entry for that user, step 365. If the resultant is greater than zero, step 367, then access is granted to the object for that user, step 369. If the resultant is less than or equal to zero, then access is denied to that object for that user, step 372.

If a particular user is associated with multiple groups, and identifies oneself with multiple groups when performing operations on the objects, the object data manager will perform a bitwise AND operation of the particular sets of credentials that are currently associated with that user. This results in assigning the least privilege associated with the intersection of the credentials sets.

The above described access control policies can be applied to various applications. An example of such an application is described in copending European application number (IBM internal docket No AT9-89-039), inventors RA Fabbio et al for "User Interface Tool". The access control lists of this embodiment can be applied to a system management interface tool for the purposes of defining the authorisation policies for the various views that may be accessed by a collection of system administrators with various authorities. Without this embodiment, one approach would be to define the collection of menus, dialogs, and prompts to represent the permutations of the various administrative views associated with the different administrative privileges. However, this technique typically results in very large databases containing a great deal of redundant information.

In contrast, with the present embodiment, the various menus, dialogs, and prompts are only stored once in the object database, and are as-

signed the appropriate access controls on the various objects (menus, dialogues, prompts) such that the various permutations of administrative views are dictated by the access control policies.

For example, Fig. 5B shows a hierarchy of interface menu option objects for performing system management tasks, 500. Along with security and users, 504, other subclasses of system management interface objects include devices, TCP/IP, physical and logical storage, communications applications and services, problem determination, etc. As shown in Fig. 5A, administrator A, 551, may have read, write, and execute privileges for the user interface objects 553 which present the configurable domain of TCP/IP, devices, and users while administrator B, 552, may have read, write, and execute privileges for the user interface objects which present the configurable domain of just users, 554. However, administrator A, 551, may only have the privilege to access to view the users 542 and the groups 543, while administrator B, 552, has access to view and manage the access control lists, 541, the users 542, the groups, 543, and passwords, 544. Therefore, administrator A would only have access to menus 542, 543, while administrator B would have access to menus 542, 543, 544, 541 as the subobjects of the configurable domains menu object class for users.

There has been described a system in which grant and revoke permissions, referred to herein as access control lists apply to a collection of objects in an object oriented database. An object data manager supports composite objects which are multiple objects and the access control policies that apply to such objects are transparent to the user. The access control lists span across the objects. Furthermore, not only do the access control lists provide read and write permissions, but they also provide execution permission for operations which apply to the objects. The execute semantics apply to methods that are invoked to perform operations on the objects. A user with execute permission can perform operations on those objects.

For example, if the objects in the object oriented database contained information on the configuration of a data processing system, a user could be either granted or revoked the permission not only to read the configuration data, but also to perform configuration operations on the data. If the configuration information contained information on the physical devices in the system, the user would be granted or revoked the permission to configure, define, start, stop, unconfigure, and undefine those devices.

While the invention has been particularly shown and described with reference to a preferred embodiment, it will be understood by those skilled

in the art that various changes may be made without departing from the scope of the invention.

Claims

1. A system for controlling access privileges to data, the system comprising:
 means for assigning at least one access control policy across a plurality of objects in an object oriented database; and
 means for controlling a plurality of operations to at least one of the plurality of objects based on the assignment and at least one credential of a user requesting access to the data represented by at least one of the plurality of objects.
2. A system as claimed in claim 1 wherein one of the plurality of operations is a read operation.
3. A system as claimed in claim 1 or claim 2 wherein one of the plurality of operations is a write operation.
4. A system as claimed in any preceding claim wherein one of the plurality of operations is an execute operation.
5. A system as claimed in claim 4 wherein the execute operation applies to the execution of at least one method associated with the object.
6. A system as claimed in any preceding claim further comprising means for inheriting the assigned at least one access control policy of the at least one object.
7. A system as claimed in any preceding claim further comprising means for inheriting the assigned at least one access control policy by a second object descending from the at least one object.
8. A system as claimed in claim 7 wherein the means for inheriting comprises means for determining the least amount of privilege associated with at least one composite object accessed by the user.
9. A system as claimed in claim 8 wherein the at least one composite object comprises one of the plurality of the objects and at least one subobject.
10. A system as claimed in any preceding claim wherein the at least one access control policy is associated with a plurality of users and a plurality of groups.
11. A procedure for controlling access privileges to data, the method comprising:
 assigning at least one access control policy across a plurality of objects in an object oriented database; and
 controlling a plurality of operations to at least one of the plurality of objects based on the assignment and at least one credential of a user requesting access to the data represented by at least one of the plurality of objects.

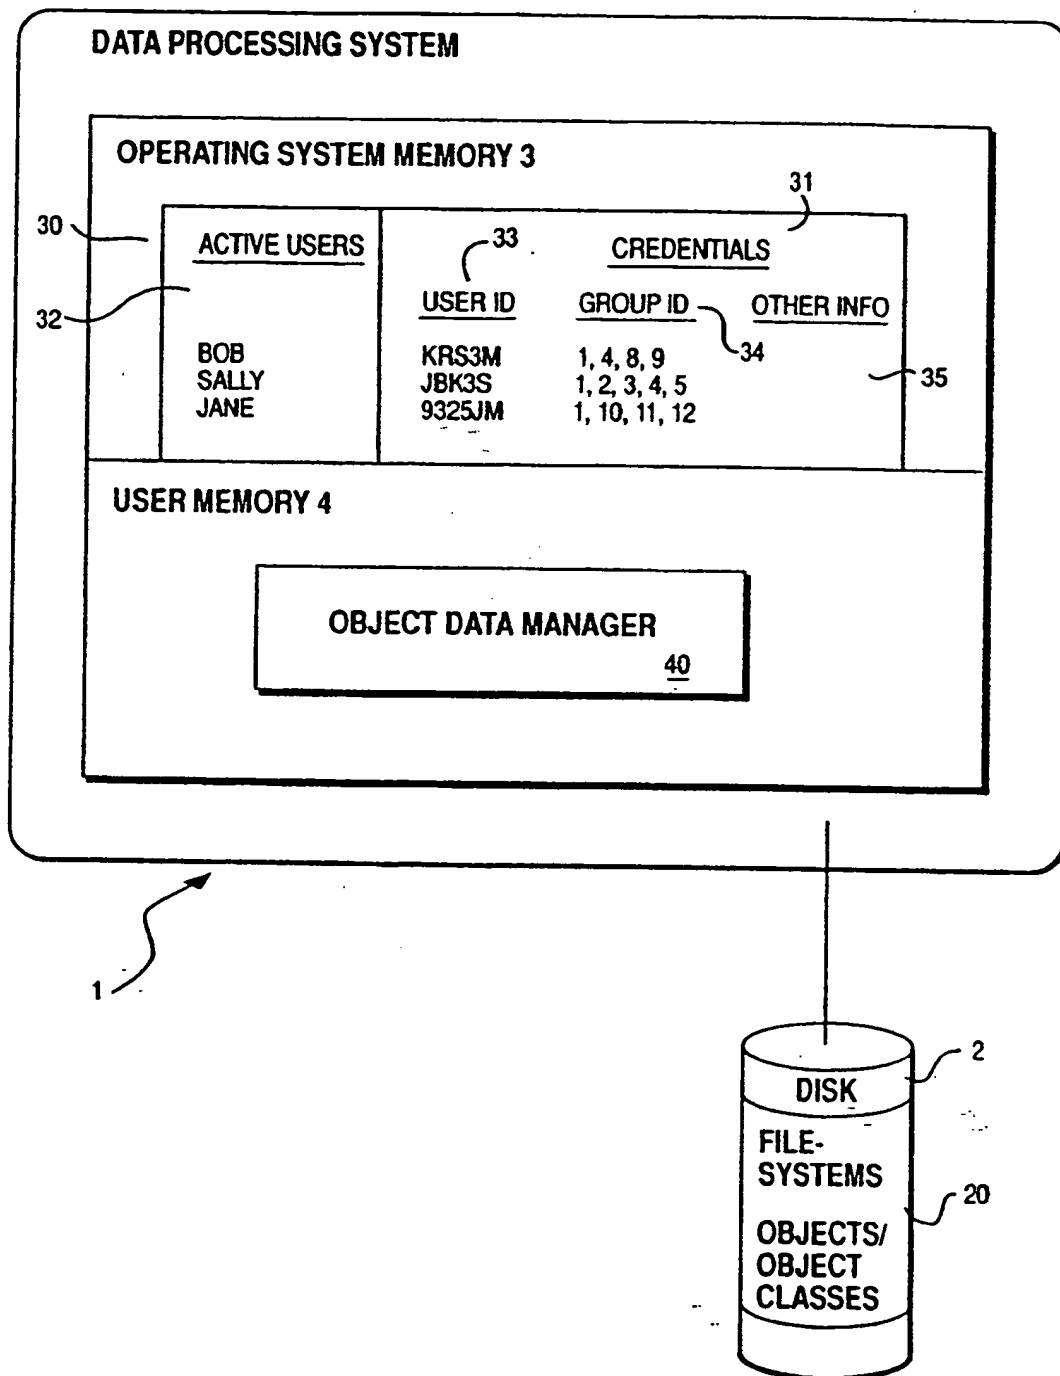


FIG. 1

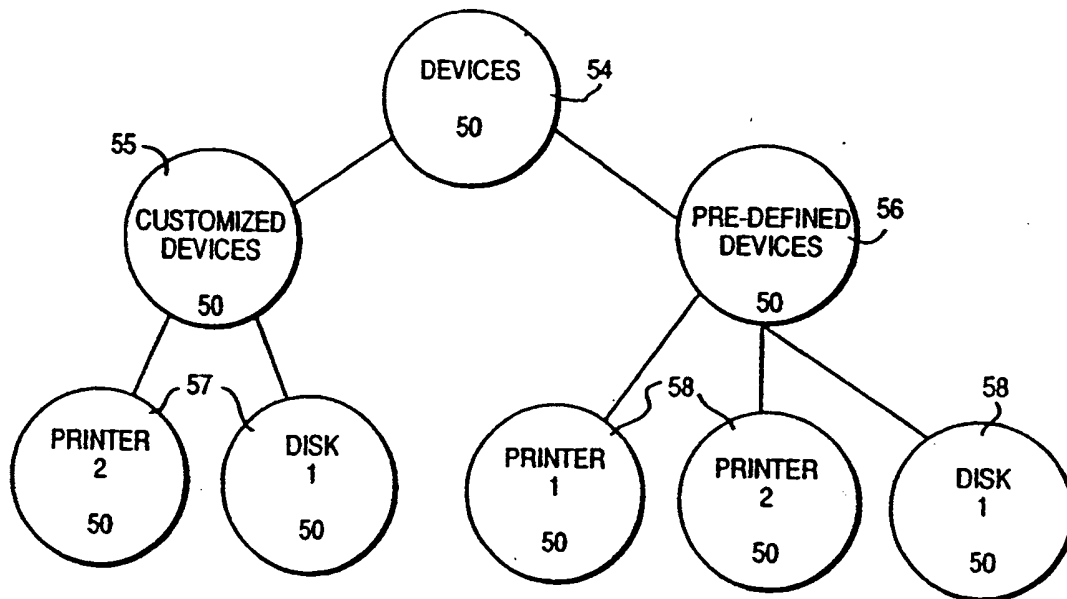


FIG. 2A

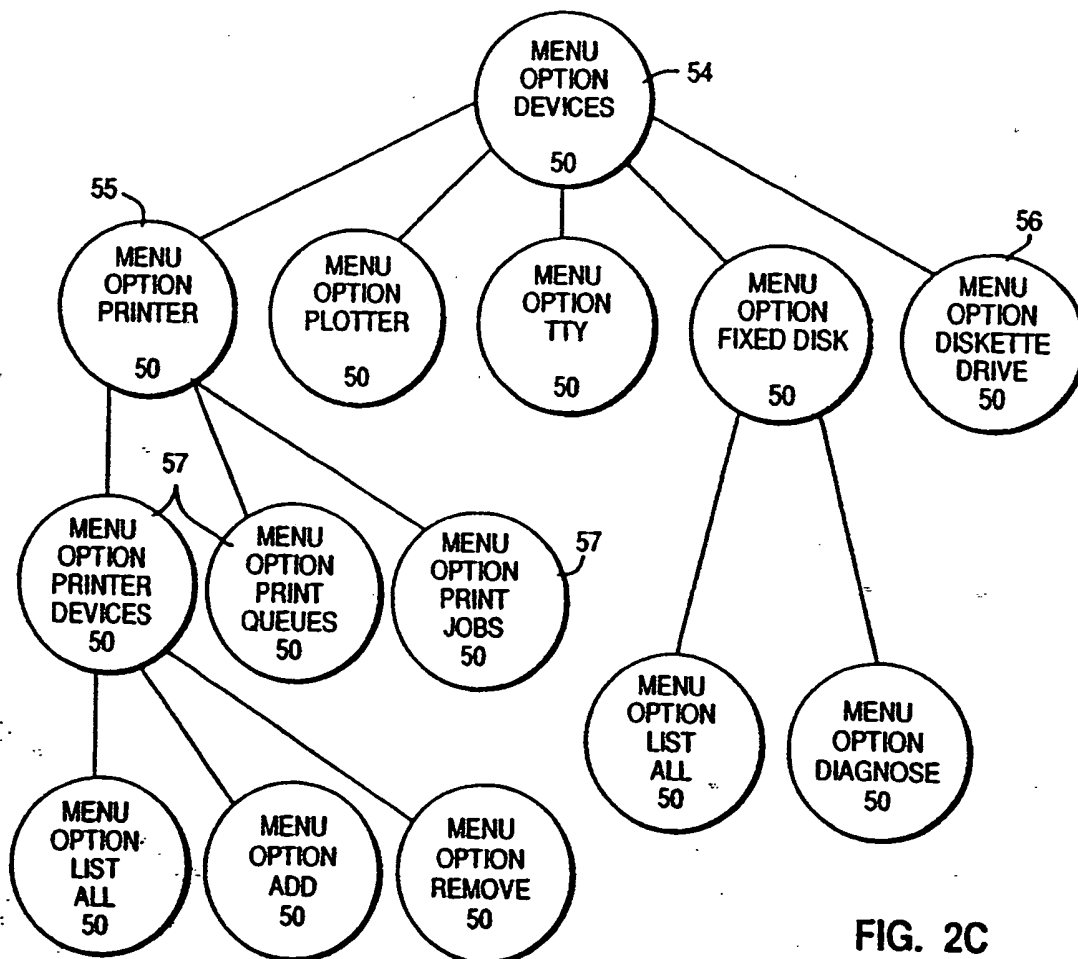


FIG. 2C

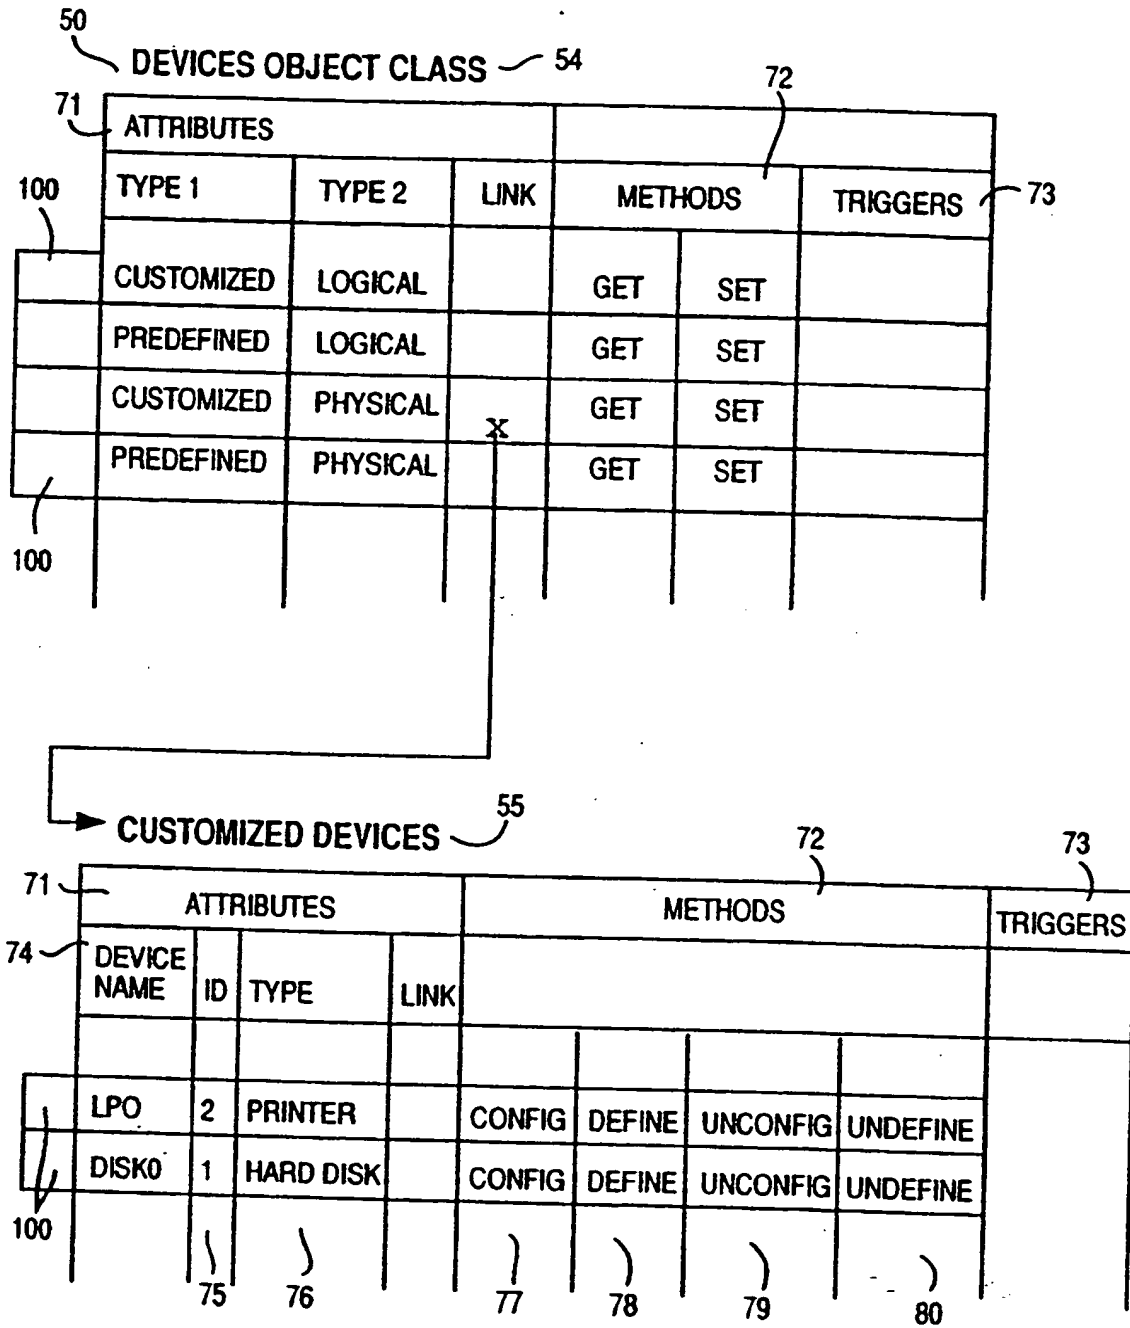


FIG. 2B

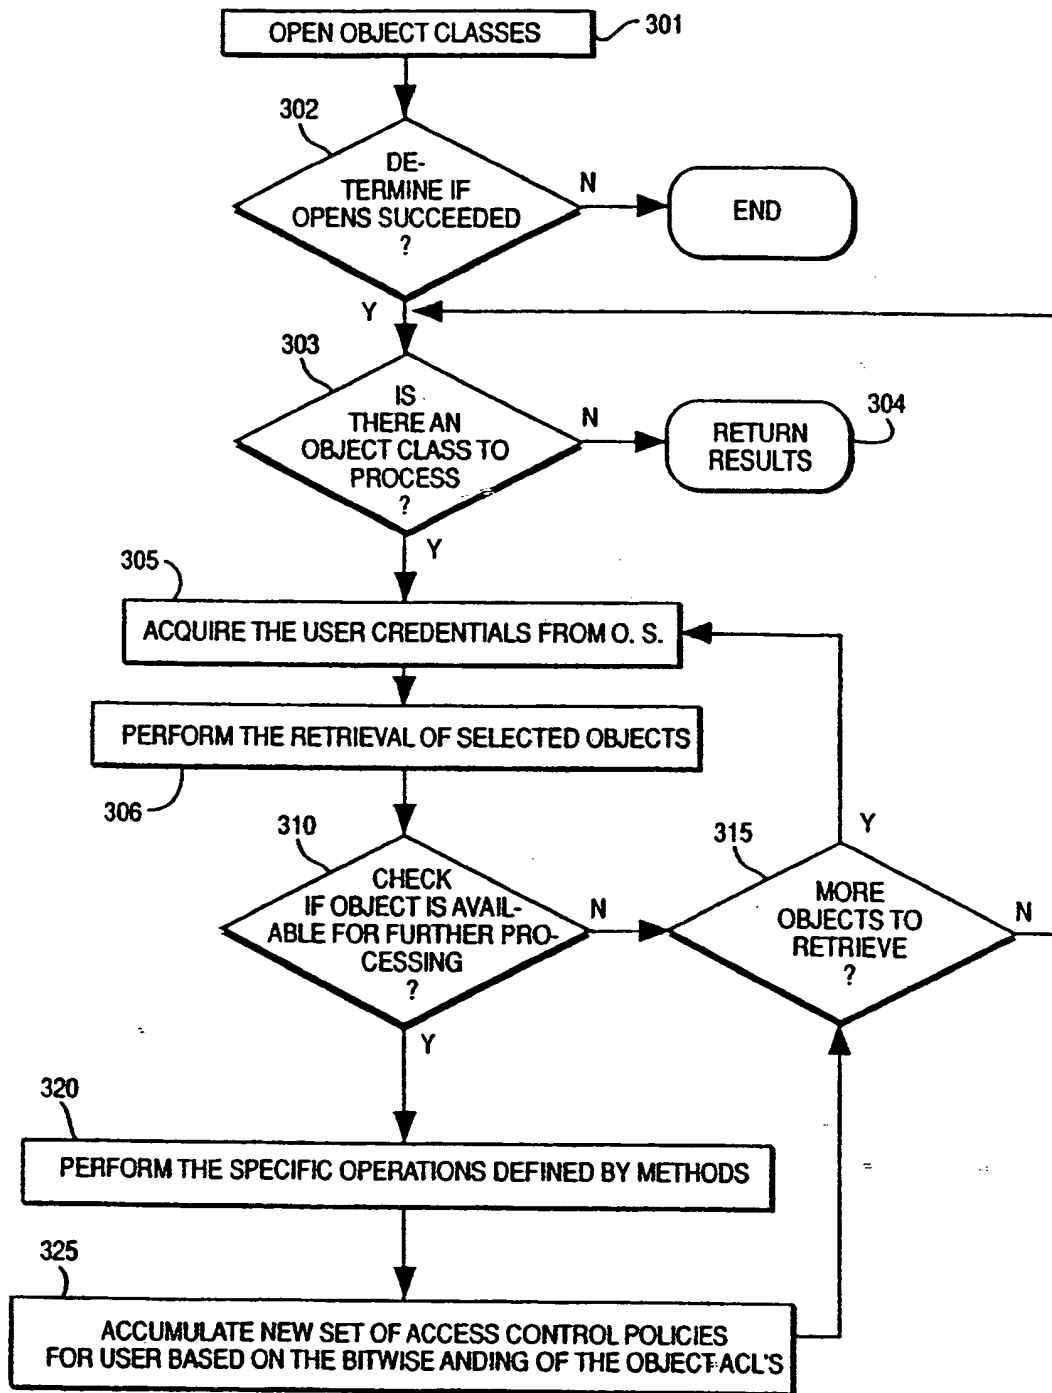


FIG. 3A

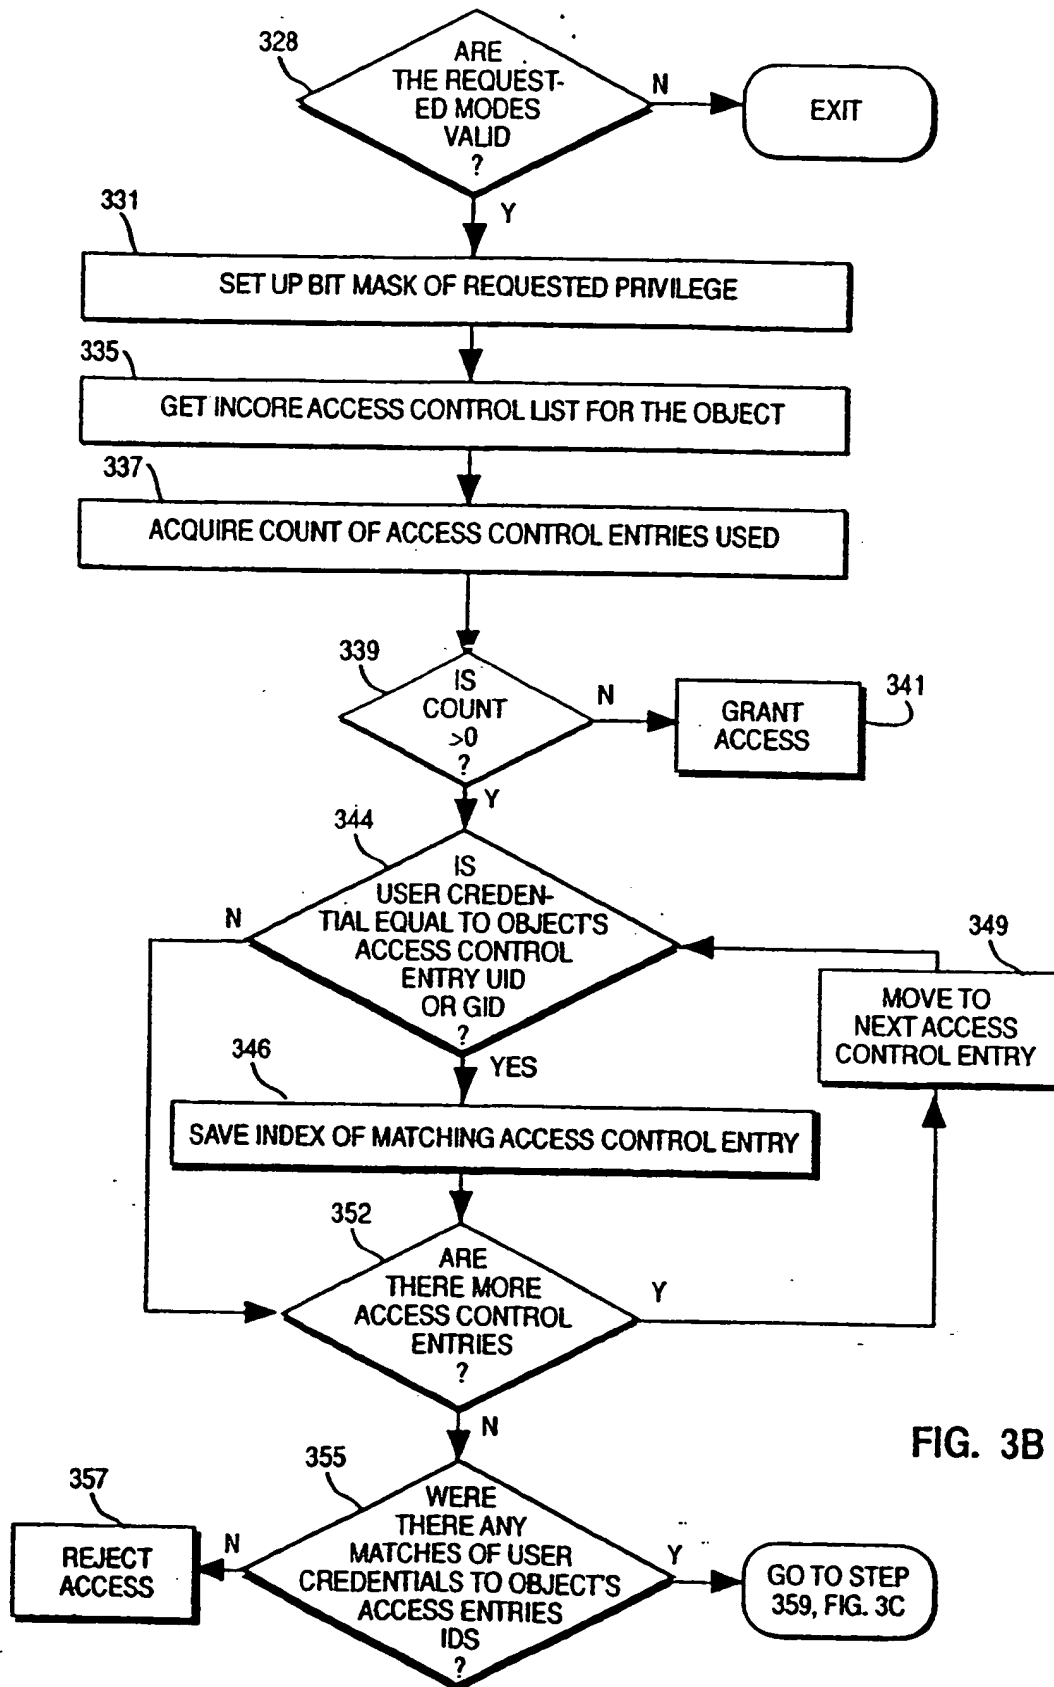


FIG. 3B

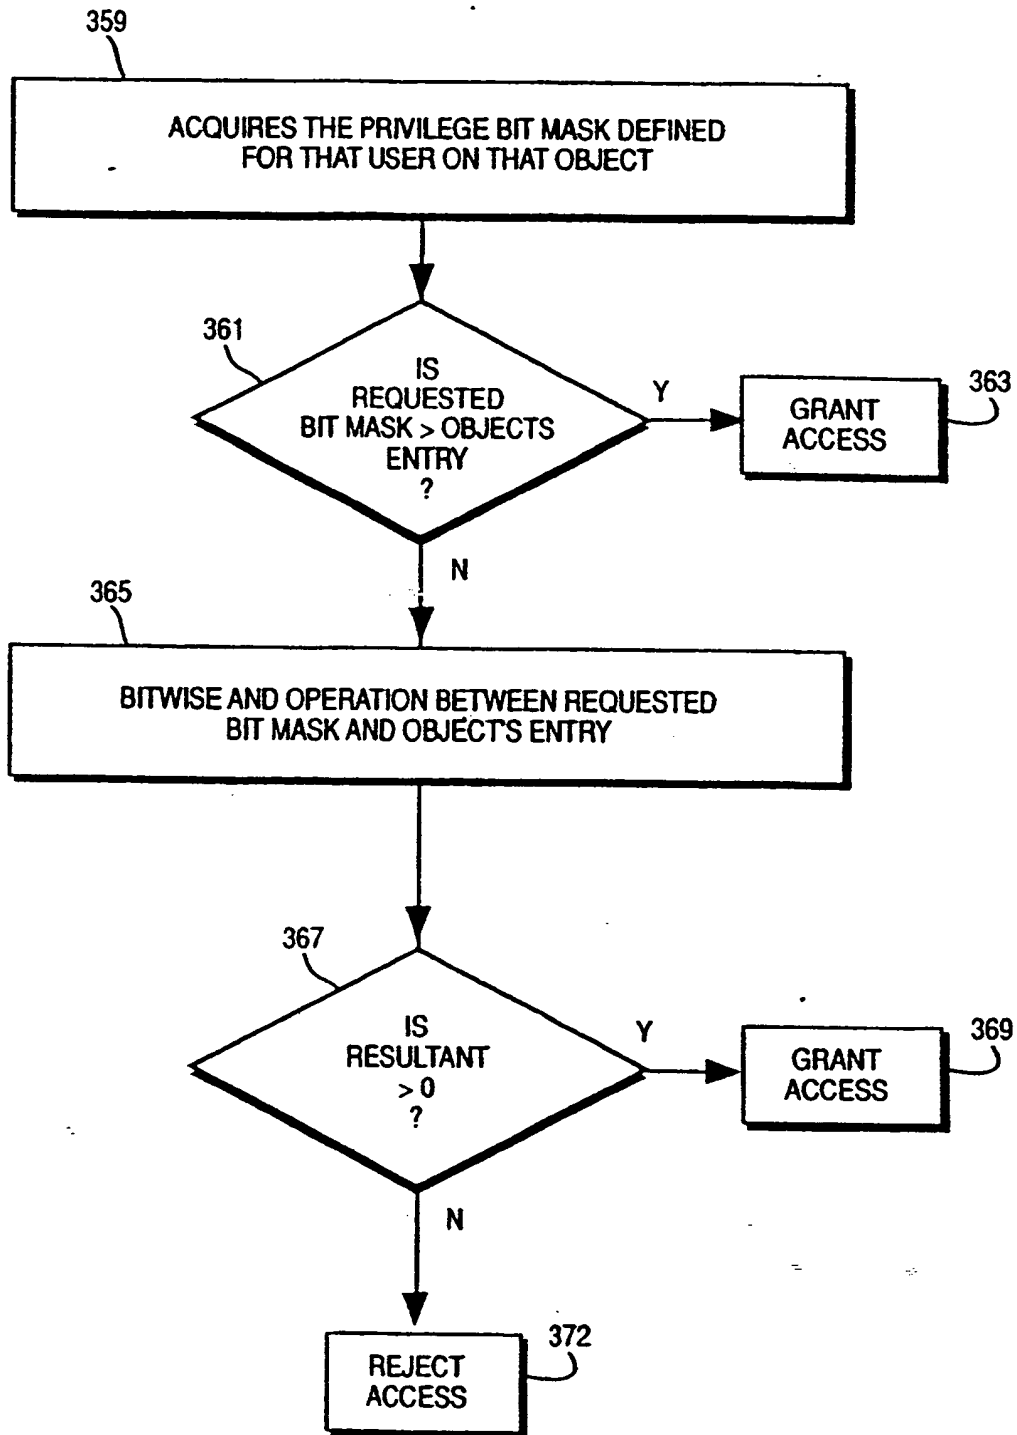


FIG. 3C

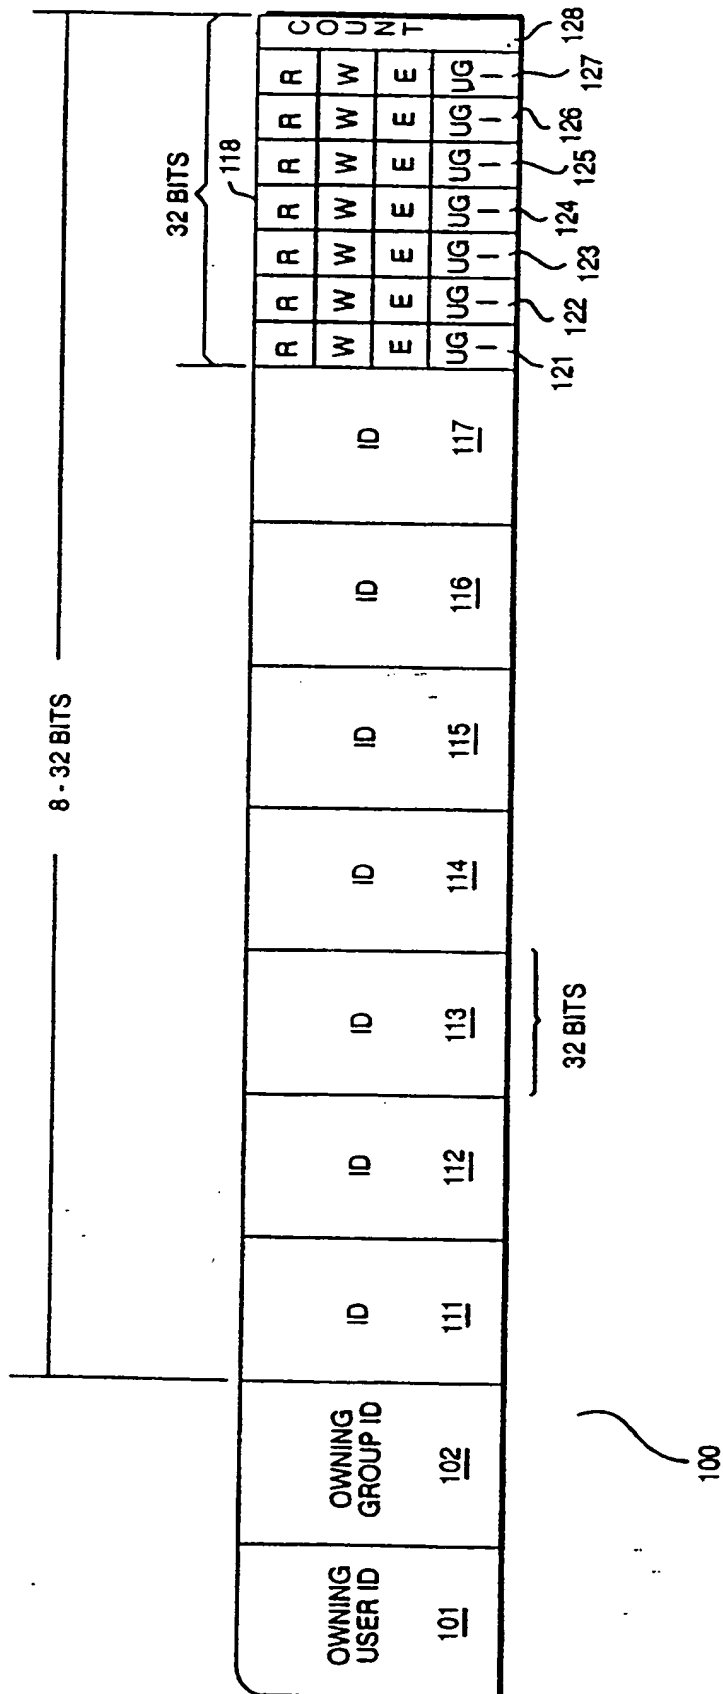


FIG. 4

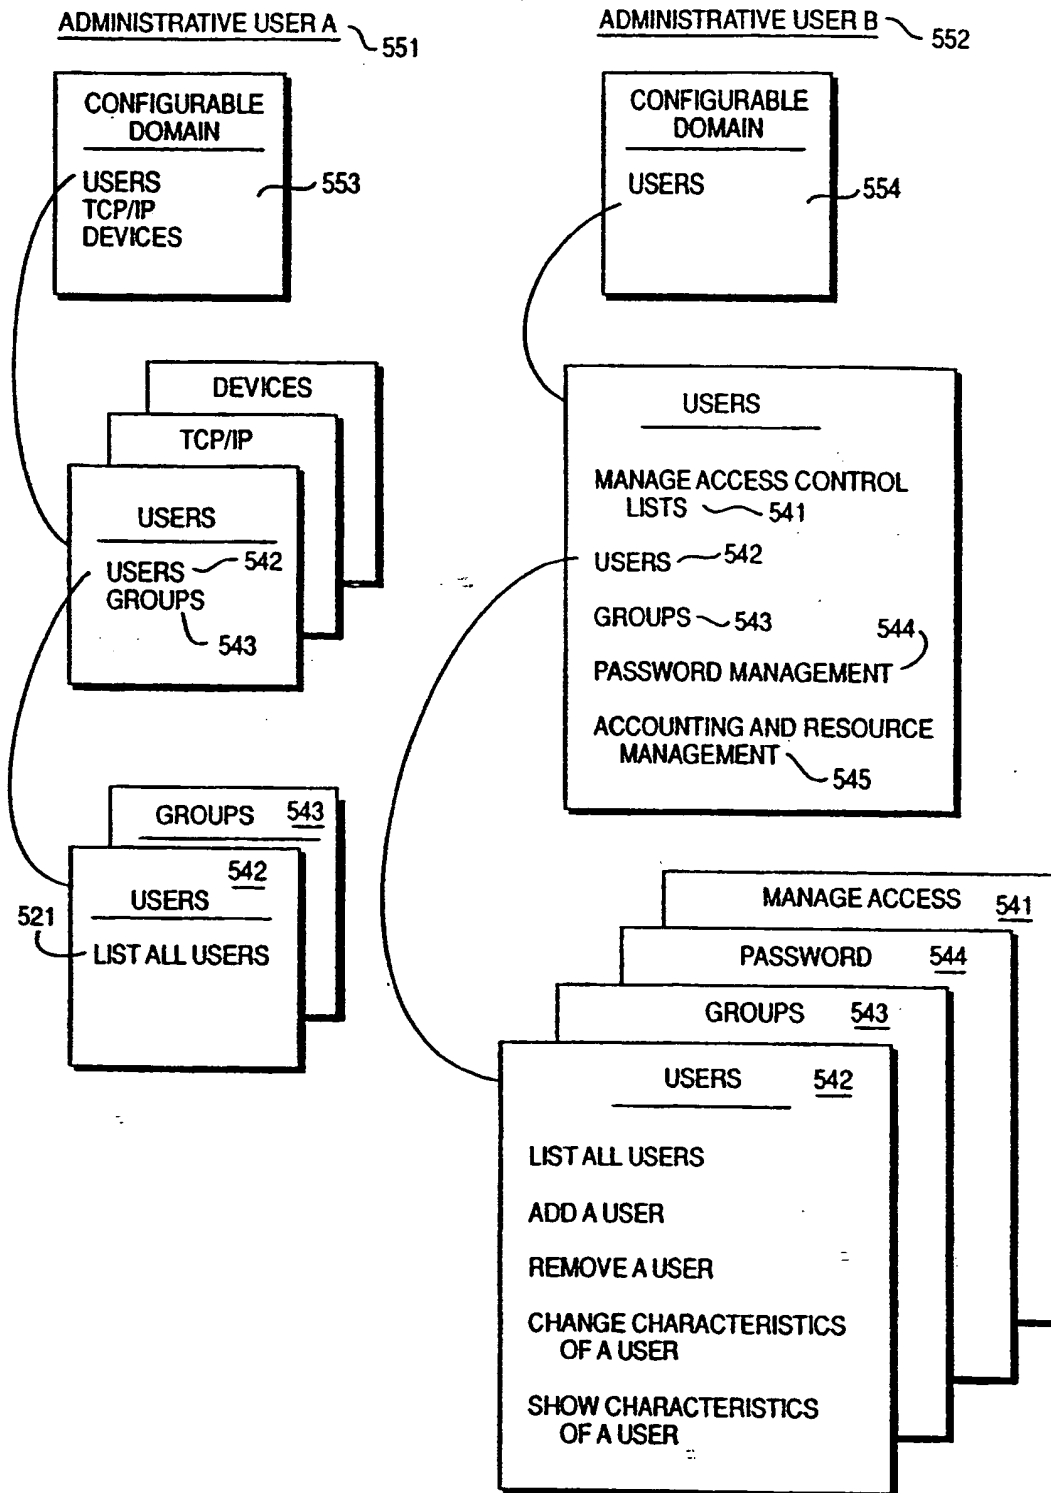


FIG. 5A

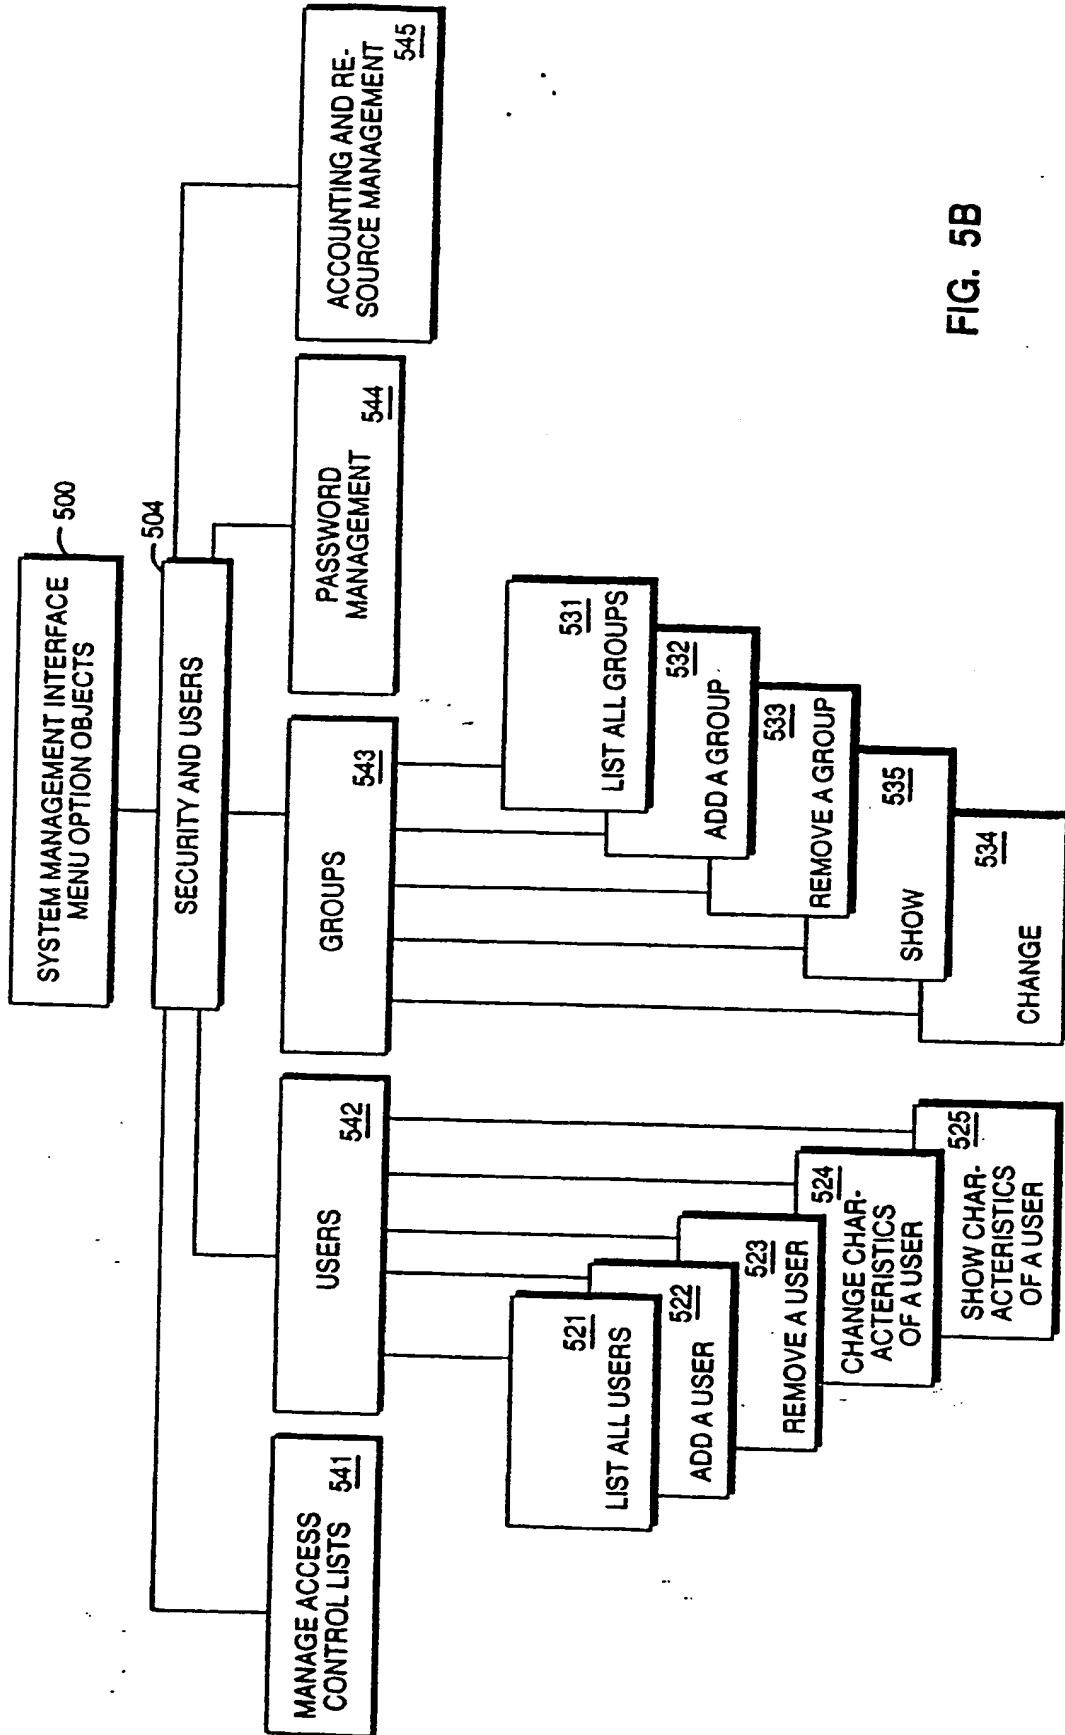


FIG. 5B

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 398 645 A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 90305218.1

(51) Int. Cl.⁵: G06F 15/40, G06F 1/00

(22) Date of filing: 15.05.90

(30) Priority: 15.05.89 US 352081

(43) Date of publication of application:
22.11.90 Bulletin 90/47

(64) Designated Contracting States:
DE FR GB

(88) Date of deferred publication of the search report:
23.12.92 Bulletin 92/52

(71) Applicant: International Business Machines Corporation
Old Orchard Road
Armonk, N.Y. 10504(US)

(72) Inventor: Fabbio, Robert Anthony
8406 Saber Creek Trail
Austin, TX 78759(US)

(74) Representative: Burt, Roger James, Dr.
IBM United Kingdom Limited Intellectual
Property Department Hursley Park
Winchester Hampshire SO21 2JN(GB)

(54) System for controlling access privileges.

(57) The system and method of this invention provides an access control list which spans across object boundaries in an object oriented database. In addition to providing read and write access permissions, the access control list provides execute semantics which apply to the execution of methods in an object oriented database. Within the entries of the access control lists, each of the permissions for read, write, and execute can be assigned separately to each of a number of ids representing user ids or group ids. Upon request for access to the data by the user, the user id of the user and the group ids for which the user is a member are searched for within the entries to determine whether the user has the privileges to perform the operation requested against the objects. In addition, the access control policies are inherited from an object's superobject; resulting in a least privilege for the object.

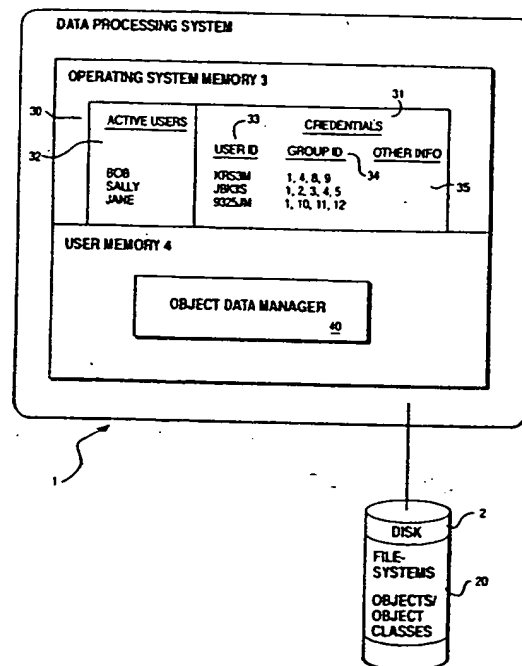


FIG. 1

EP 0 398 645 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 90 30 5218

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL.5)
X	1989 IEEE COMPUTER SOCIETY SYMPOSIUM ON SECURITY AND PRIVACY 3 May 1989, OAKLAND, CALIFORNIA pages 110 - 115 E.B.FERNANDEZ ET AL. 'A security model for object oriented databases' * page 111, column 1, line 21 - page 112, column 1, line 24 * -----	1,6-11	G06F15/40 G06F1/00
			TECHNICAL FIELDS SEARCHED (Int. CL.5)
			G06F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 29 OCTOBER 1992	Examiner KATERBAU R.E.
CATEGORY F CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document	